


LED PANEL LIGHT



PL 240 SERIES



Application

Cabins, Passageways, Galleys, Cafeterias

Material


Marine grade aluminium, comes with high-efficiency light guide

Weight

3.3Kg


Key Features

- Easy installation with no external drivers needed
- Super slim design for surface mounted application
- High-efficiency constant current driver
- 70% more energy-efficient compared to 2X18W fluorescent lighting system
- Long service life of 50,00 hours L70 @ 40°C
- Safety, EMC and IEC compliance



Height	AVR E	Diameter
1.00m	209.59lx	286.85cm
2.00m	52.40lx	573.70cm
3.00m	23.29lx	860.55cm
4.00m	13.10lx	1147.41cm
5.00m	8.38lx	1434.26cm

Angle: 110.2°

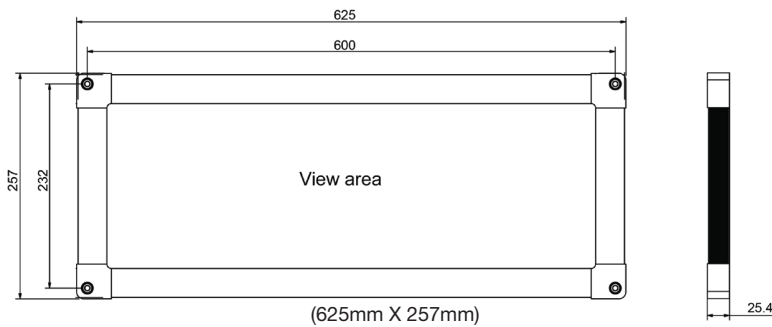


TECHNICAL SPECIFICATIONS

IP 22

IP 44

Ideal Replacement:



Type	IP Rating	Main Voltage	Power	CCT	Driving Current	CRI Index	Ambient Temp	System Lumen
PLU24040/22	22	100V ~ 240V AC	24W	4,000K	800mA	80	-20 ~ 40°C	1,700lm
PLU24040/44	44							

Type	IP Rating	Main Voltage	AC Power	DC Power	CCT	Driving Current	CRI Index	Temp	System Lumen (AC)	System Lumen (DC)
PLE24040/22	22	100V ~ 240V AC/ 24V DC	24W	<5W	4,000K	800mA	80	-20 ~ 40°C	1,700lm	>120lm
PLE24040/44	44									

Also available in other CCT.

