


LED AIRTIGHT LUMINAIRE



AT SERIES



Key Features

- Special designed polycarbonate diffuser to optimize the LED light transmission
- Slim profile design that is easily mounted to provide illumination performance while using significantly less energy
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- Safety, EMC and IEC compliance



Application

Open decks, Deck rails

Material

Polycarbonate diffuser and end cap

Electrical



Flexible wiring, Heat resistance up to 105°C

Options

100V ~ 120V AC

Weight

3.3Kg

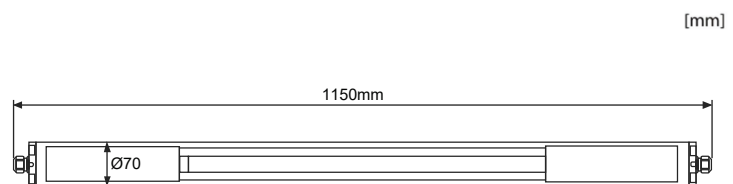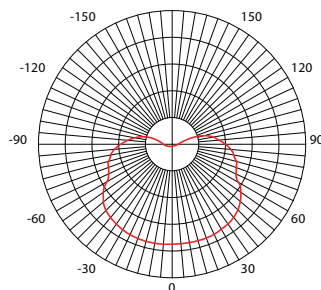

TECHNICAL SPECIFICATIONS IP 68

Ideal Replacement: 1 X 18W

BH Code	Type	Voltage	Power	CCT	Ambient Temp (Ta)	System Lumen
IGLATA4110A1	ATA-411	100V - 120V AC	1x12.5W	5000K	-20°C ~ +40°C	970lm
IGLATA4110	ATA-411	220V - 240V AC	1x12.5W	5000K	-20°C ~ +40°C	970lm

Also available in other CCT.

